



AllTapeSupplies

# Technical Data Sheet


## DUC461RS

### Duct Tape

#### KEY FEATURES & APPLICATIONS

- Suitable for marking, bundling wires and cables, harness type.
- Useful for covering sharp edges, floor marking.
- Excellent adhesion.
- Abrasion-resistant
- Removable and low residue

#### CARRIER AND ADHESIVE

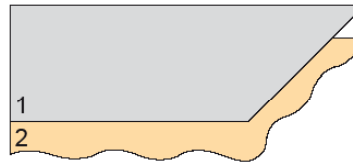

1. Rayon cloth carrier
2. Natural rubber adhesive

#### TECHNICAL DETAILS

Properties	Value
Total Thickness	300 [micron]
Adhesion to steel	3,1 [N/cm]
Tensile strength	101,9 [N/cm]
Mesh	146 [#]

#### INSTRUCTIONS FOR USE & STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals.
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Use this product within one year from the date of manufacture. Keep away from direct sunlight.

Disclaimer: The above information is given in good faith, but the user should insure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. ATS All Tape Supplies cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the tapes suitability for their own applications. Please take care when using this product on untreated aluminium and copper as it could leave adhesive residues on these substrates.

information sales@alltape.eu  
[www.alltape.eu](http://www.alltape.eu)