




DUC654RS

Duct Tapes

KEY FEATURES & APPLICATIONS

- High quality cloth tape with natural rubber based adhesive
- Easy tearable by hand
- Easy roll-off and good adhesion on surfaces
- Waterproof and abrasion resistant
- The tape has a matte finish and writing on the tape is possible
- Suitable for application on rough surfaces like cloth, asphalt etc.
- Suitable for different applications: equipment fixing, marking on floor, cable covering etc.

CARRIER AND ADHESIVE

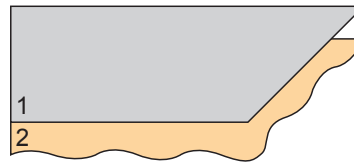

1. Fluorescent fabric cloth carrier (green, yellow, pink & orange)
2. Natural rubber adhesive

TECHNICAL DETAILS

Properties	Value
Total thickness	300 [micron]
Peel adhesion	3,92 [N/cm]
Tensile strength	98 [N/cm]
Elongation at break	6 [%]
Holding Power	60 [min.]

INSTRUCTIONS FOR USE & STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals.
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Use this product within one year from the date of manufacture. Keep away from direct sunlight.
- Not suitable for application on carbon, zinc, lead (also paint based on lead), copper, anodized metals or natural stone (marble etc.).
- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals.