



AllTapeSupplies


Technical Data Sheet

FLP230RS Masking Tape

KEY FEATURES & APPLICATIONS

- Flatpaper masking tape with a rubber solvent adhesive for high temperature applications.

CARRIER AND ADHESIVE

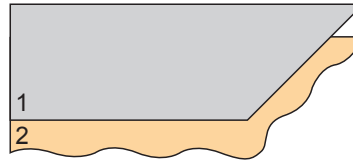

1. Flatpaper carrier (Blue)
2. Rubber solvent adhesive

TECHNICAL DETAILS

Properties	Value
Total thickness	230 [Micron]
Adhesion to steel	8,0 [N/cm]
Tensile strength	87,4 [N/cm]
Elongation	3 [%]
Temp. resistance	200 [°C]

INSTRUCTIONS FOR USE & STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals.
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 10°C and 30°C.
- Use this product within one year from the date of manufacture. Keep away from direct sunlight.

*As this product is still in development, properties, features and applications are an indication.

Disclaimer: The above information is given in good faith, but the user should insure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. ATS All Tape Supplies cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the tapes suitability for their own applications. Please take care when using this product on untreated aluminium and copper as it could leave adhesive residues on these substrates.

information sales@alltape.eu
www.alltape.eu