




PE474SA

Polyethylene Tapes

KEY FEATURES & APPLICATIONS

- PE protection film
- Indoor and outdoor protection for glass, plastic window frames & carpets.
- A protective film that can be used to protect sensitive surfaces against mechanical damage and dust in transport, storage and assembly
- The film can be removed without leaving any residues

CARRIER AND ADHESIVE

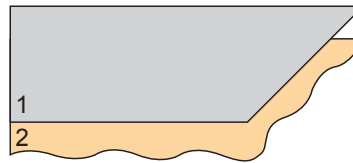

1. PE Film carrier, blue
2. Acrylic Adhesive

TECHNICAL DETAILS

Properties	Value	
Total thickness	42	Micron
Film thickness	40	Micron
Elongation	300	%
Adhesion to steel	0,49	N/cm
Temp. resistance	60	°C
UV resistance	60	days

INSTRUCTIONS FOR USE & STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals.
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Use this product within one year from the date of manufacture. Keep away from direct sunlight.