



AllTapeSupplies

Technical Data Sheet


DSO100SA

Double Sided PP Tapes

KEY FEATURES & APPLICATIONS

- Double coated OPP tape with a solvent acrylic adhesive
- Good adhesion and transparency
- Suitable for a variety of surfaces.
- General applications, paper sticking, bag sealing, carpet sticking

CARRIER AND ADHESIVE

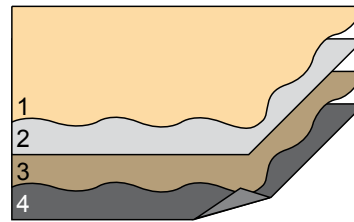

1. Solvent acrylic adhesive
2. Transparent polypropylene carrier
3. Solvent acrylic adhesive
4. White siliconized paper liner (100 gram/m²)

TECHNICAL DETAILS

Properties	Value	
Total thickness	100	[micron]
Initial tack	>150	[mm]
Peeling strength	12/25	[N/mm]
Holding power	120	[min.] [23°C]

INSTRUCTIONS FOR USE & STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Use this product within one year from the date of manufacture.

Disclaimer: The above information is given in good faith, but the user should insure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. ATS All Tape Supplies cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the tapes suitability for their own applications. Please take care when using this product on untreated aluminium and copper as it could leave adhesive residues on these substrates.

information sales@alltape.eu
www.alltape.eu