



AllTapeSupplies

Technical Data Sheet


DUC430RS

Duct Tapes

KEY FEATURES & APPLICATIONS

- PE-coated duct tape with rubber based adhesive
- For sandblasting, bundling, seaming, vinyl repairing and packing

CARRIER AND ADHESIVE

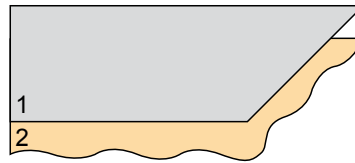

1. PE-coated cloth
2. Natural rubber adhesive

TECHNICAL DETAILS

Properties	Value	
Total thickness	430	[micron]
Peel adhesion	5,88	[N/cm]
Rewinding force	3,92	[N/cm]
Tensile strength	66,7	[N/cm]
Holding Power	30	[min.]
Temp. resistance	-35 to 80	[°C], [60 min.]

INSTRUCTIONS FOR USE & STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Use this product within one year from the date of manufacture.

Disclaimer: The above information is given in good faith, but the user should insure himself that the performance of the product is sufficient for his application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. ATS All Tape Supplies cannot be held responsible for product failure unless full testing has been carried out. The client has to decide on the tapes suitability for their own applications. Please take care when using this product on untreated aluminium and copper as it could leave adhesive residues on these substrates.

information sales@alltape.eu
www.alltape.eu