


GLC360SI Glass Cloth Tapes

KEY FEATURES & APPLICATIONS

- Insulation grade silicone coated glass cloth tape with a high temperature resistant silicone adhesive
- Suitable for electrical insulation, sandblasting, shot blasting, grit blasting, plasma spray, thermal spray, powder coating wire wrapping and for use on thermal insulation gaskets.
- The silicone rubber coating is abrasion and high temperature resistant.
- Excellent adhesion at high temperatures whilst still removing cleanly after use

CARRIER AND ADHESIVE

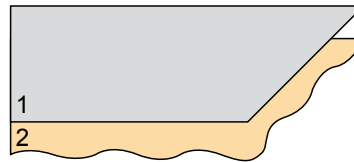

1. Silicone coated glass cloth carrier
2. Silicone adhesive

TECHNICAL DETAILS

| Properties | Value |
|---------------------|-----------------------|
| Thickness, carrier | 130 [micron] |
| Thickness, adhesive | 50 [micron] |
| Thickness, total | 180 [micron] |
| Peel adhesion | 3,8 [N/cm] |
| Tensile strength | 39 [N/cm] |
| Elongation | 20 [%] |
| Dielectric strength | >2.5 [kV] |
| Temp. resistance | Max 280°C, 30 minutes |
| Insulation grade | H |

STORAGE

- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Use this product within one year from the date of manufacture.