




SCP027WA Masking Tapes

KEY FEATURES & APPLICATIONS

- This is a crepe paper masking tape with an acrylic adhesive. It is flexible, conformable and it strips cleanly
- UV resistant up to 14 days
- Good performance on a variety of applications that require easy removal
- For use on glass, vinyl and wood where clean removal is required
- Apply to clean, smooth surfaces free of oil and dirt
- Not recommended for use on wallpaper, unpainted wallboard, ceiling tiles or with uncured coatings.

CARRIER AND ADHESIVE

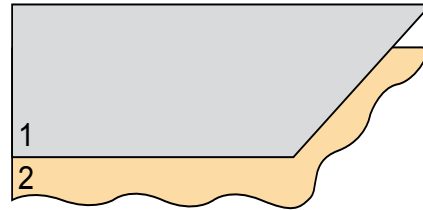

1. Crepe paper carrier
2. Acrylic adhesive

TECHNICAL DETAILS

| Properties | Value |
|---------------------|--------------|
| Total thickness | 140 [micron] |
| Adhesion to steel | 2,08 [N/cm] |
| Tensile strength | 42,0 [N/cm] |
| Elongation at break | 6 [%] |

INSTRUCTIONS FOR USE & STORAGE

- Tape performance is guaranteed within the first 6 months.
- Keep the tape clean and dry in a well ventilated area, preferably at a temperature between 15°C and 25°C.
- Surfaces on which the tape is applied should be dry, free from dust, oil, solvents or other chemicals.
- Use this product within one year from the date of manufacture.